


Features

1. 130 Watts Peak Pluse Power per(8/20 μ s)
2. IEC61000-4-2 (ESD) \pm 15kV (air), \pm 8kV (contact)
3. IEC61000-4-4 (EFT) 40A (5/50ns)
4. Protects two bidirectional line
5. Low clamping voltage
6. Low leakage current
7. Working voltages : 5.0V, 12V
8. Meets MSL 1 Requirements


Applications

1. Cell Phone Handsets and Accessories
2. Microprocessor based equipment
3. Personal Digital Assistants (PDA's)
4. Notebooks, Desktops, and Servers
5. Portable Instrumentation
6. Networking and Telecom
7. Serial and Parallel Ports
8. Quick charger

Pin Configuration



Circuit Diagram



Mechanical Characteristics

1. Package: SOT-23
2. Flammability Rating: UL 94V-0
3. Terminal: Matte tin plated.
4. High temperature soldering guaranteed: 260 $^{\circ}$ C/10s
5. Packaging: Tape and Reel


Absolute Maximum Ratings (T_A=25 $^{\circ}$ C unless otherwise specified)

Parameter	Symbol	Value	Unit
ESD per IEC 61000-4-2 (Air)	V _{ESD}	\pm 30	KV
ESD per IEC 61000-4-2 (Contact)		\pm 20	
Peak Pulse Power(tp=8/20us waveform)	P _{PP}	130	W
Operating Temperature	T _{OPT}	-55 to +150	$^{\circ}$ C
Storage Temperature	T _{STG}	-55 to +150	$^{\circ}$ C
Lead Solder Temperature – Maximum (10 Second Duration)	T _L	260(10 sec.)	$^{\circ}$ C


Electrical Characteristics (TA=25°C unless otherwise specified)

PART NUMBER	DEVICE MARKING	V _{RWM} (V) (max.)	V _B (V) (min.)	I _T (mA)	V _{C@1A} (V) (max.)	V _C (V)		I _R (μA) (max.)	C _T (pF) (max.)
						(max.)	(@A)		
SM05OC	CO05	5.0	5.6	1	8.5	16.0	8	1	15
SM12OC	CO12	12.0	13.3	1	19	26.0	5	0.2	15

ELECTRICAL CHARACTERISTICS CURVE

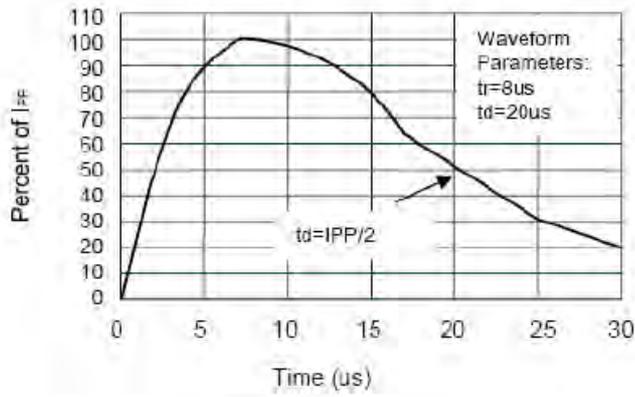


Pulse Waveform

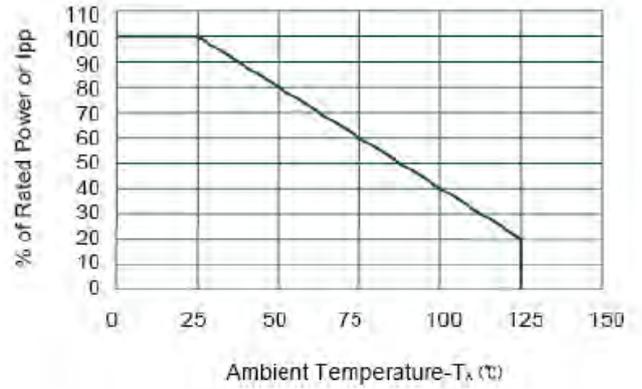

Power Derating Curve

SOT-23 Tape and Reel

SOT-23 Embossed Carrier Tape

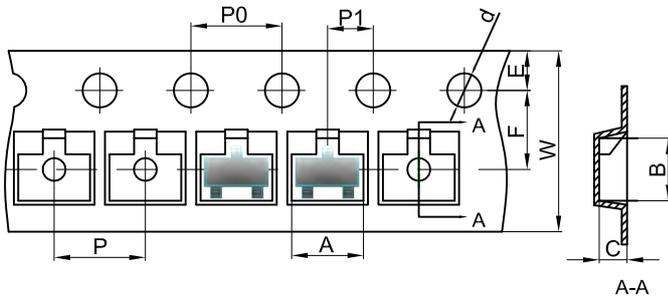


Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

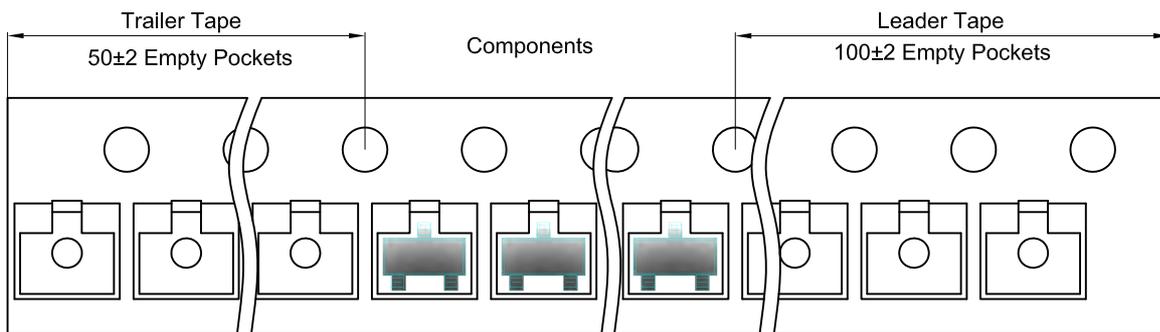

SOT-23 Reel

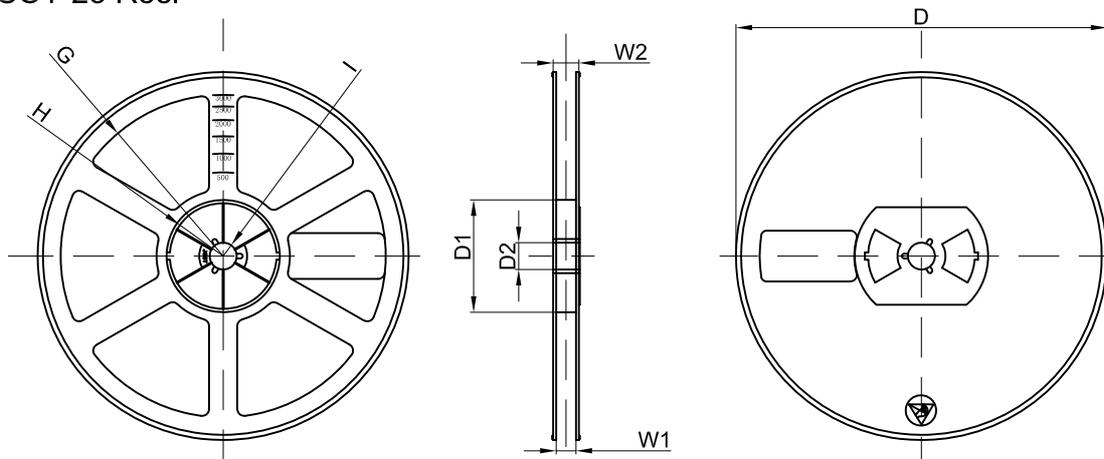

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 Inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	